



Quad Ridged Horn Antenna

The QRH40 antenna combines small dimensions with high accuracy and perfect electrical parameters. For safe storage, it is placed in a tailor-made wooden box, which guarantees that your antenna will always be in the best condition.

Features and Specifications



Technical Performance

- Wide bandwidth
- Low return loss
- Individual calibration
- Covers 5G frequency band



Design and Surface Treatment

- Corrosion-resistant coating
- Includes standard mount
- Storage in protective tailor-made wooden box



Manufacturing Technology

- Manufactured using a high grade aluminum alloy
- Extremely durable
- High quality K type coaxial connector



Product Packaging Includes

- Adapter with 1/4 inch inner thread, supplied with antenna
- Linear polarized double ridged broadband horn antenna

Product Parameters

PRODUCT IDENTIFICATION

Product Name	QRH40
Product Category	Quad Ridged Horn Antenna

ELECTRICAL SPECIFICATIONS

Frequency Range	4 GHz – 40 GHz
VSWR (max.)	2.4
VSWR (avg.)	1.4
Impedance	50 Ohm
Connector	K
Power (CW / Peak)	10 W / 20 W
Antenna Factor	35 – 49 dB/m
Port Isolation	-28 dB
Polarization	Dual Linear, Circular (with hybrid)

PHYSICAL SPECIFICATIONS

Width	53 mm (2.087 in)
Height	68 mm (2.677 in)
Depth	53 mm (2.087 in)
Weight	0.068 kg (0.150 lb)

OPERATING CONDITIONS


Rated Temperature Range	0°C – +50°C
Storage Temperature Range	-20°C – +70°C

MOUNTING FLANGE


Mounting	Adapter with 1/4 inch inner thread, supplied with antenna
----------	--

Mechanical Drawings

Antenna

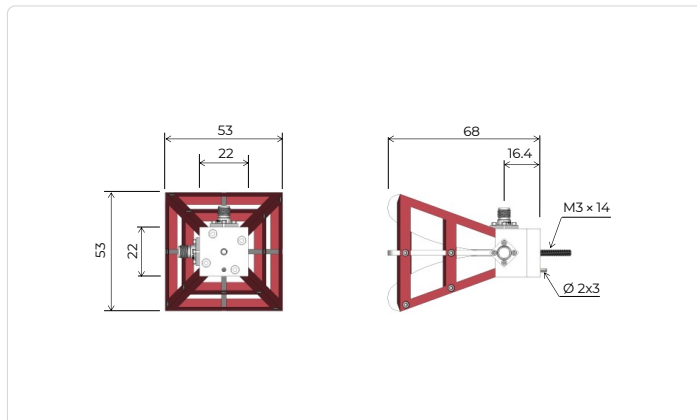


Mounting flange

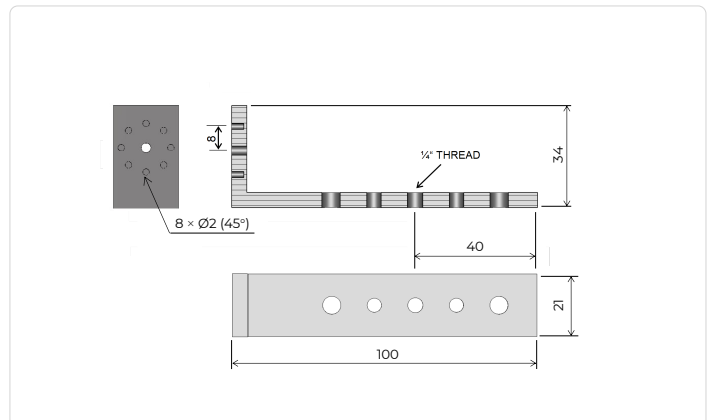


Parameters and Performance

Typical parameters


VSWR

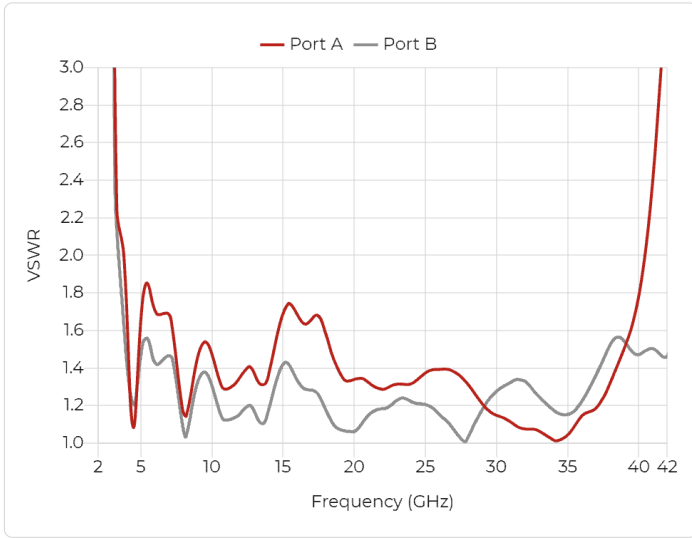


Gain

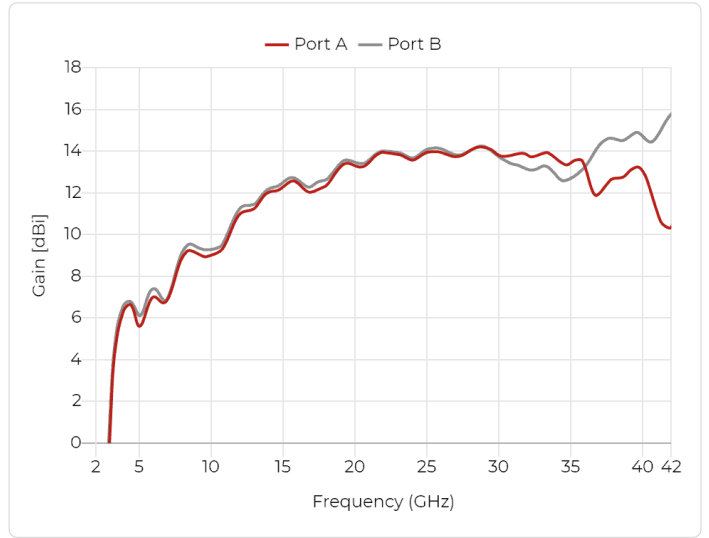


Antenna Factor

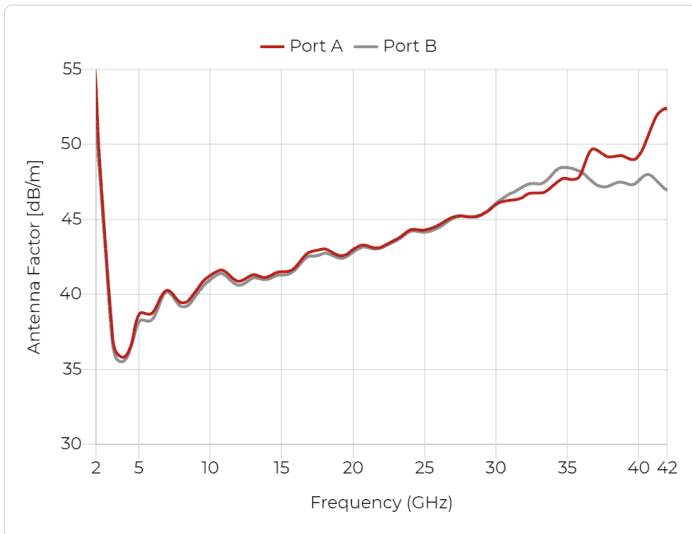

Port Isolation

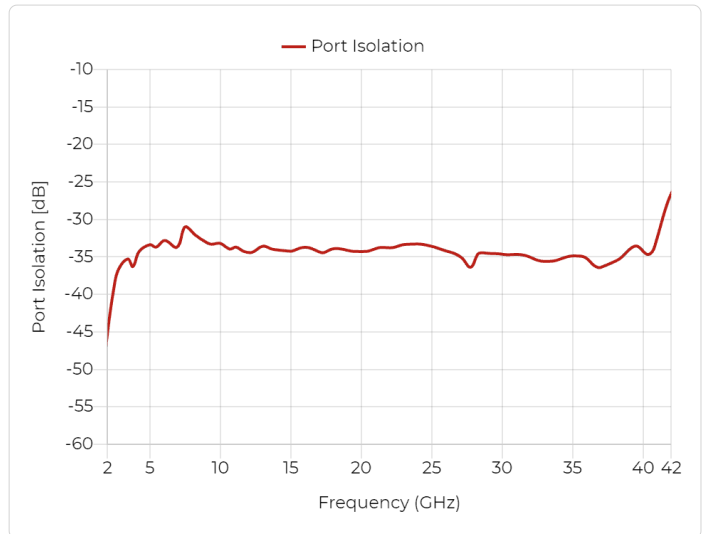


Cross Polarization

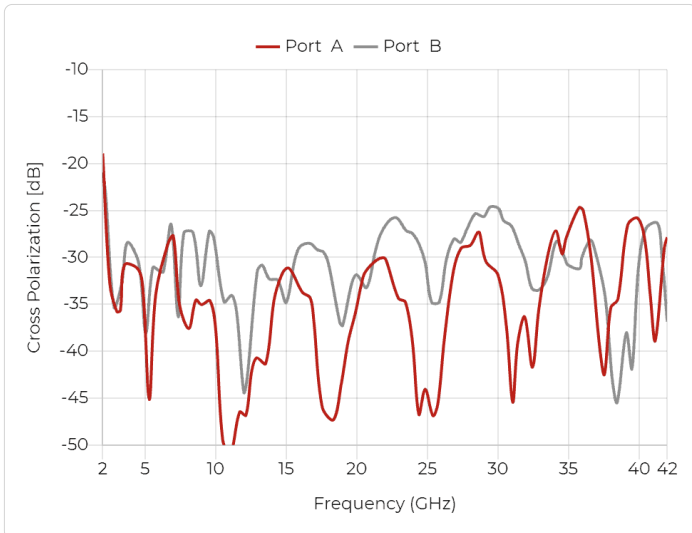


Beamwidth


Port A, E plane

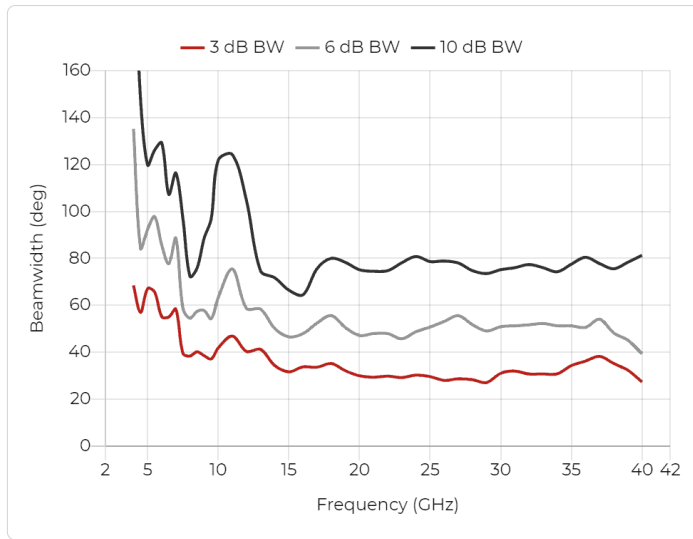


Port A, H plane

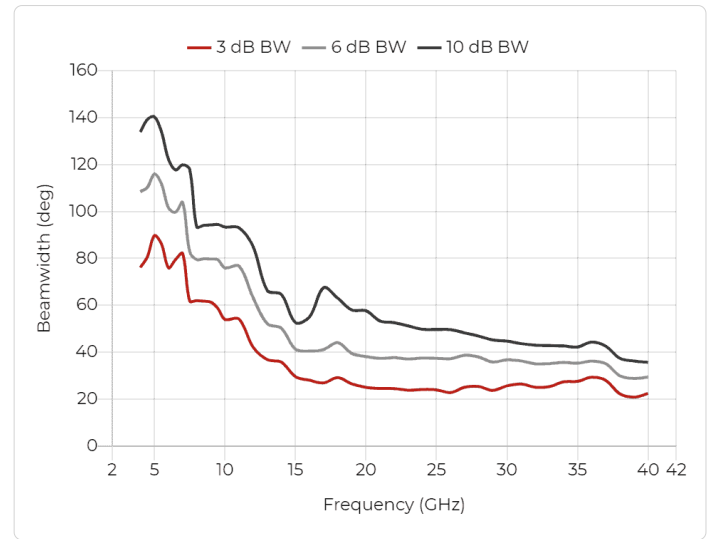

Port B, E plane

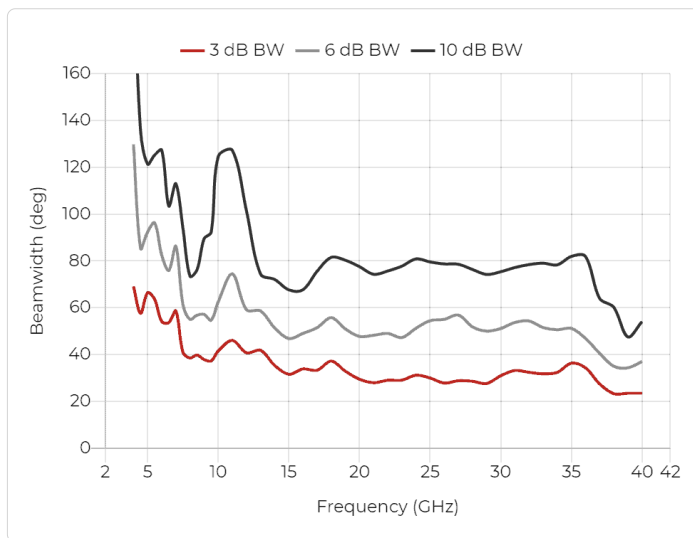


Port B, H plane

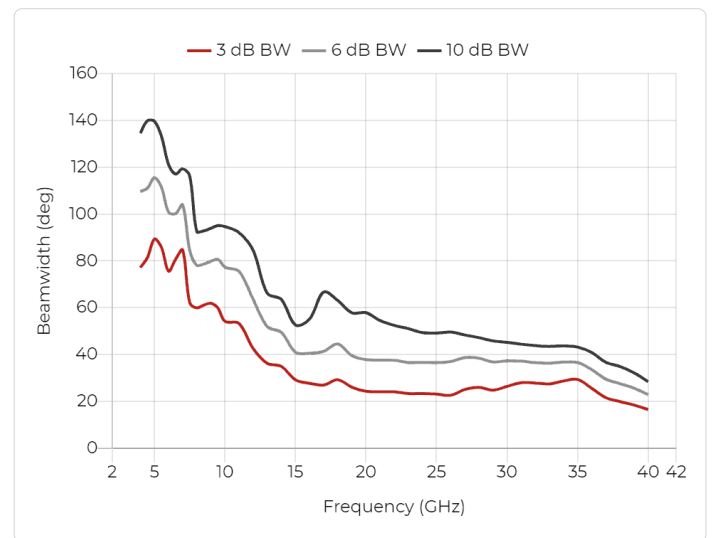


Radiation Patterns - Port A


Port A, 4 GHz

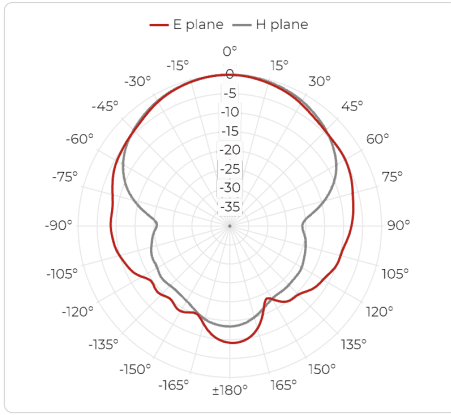


Port A, 6 GHz

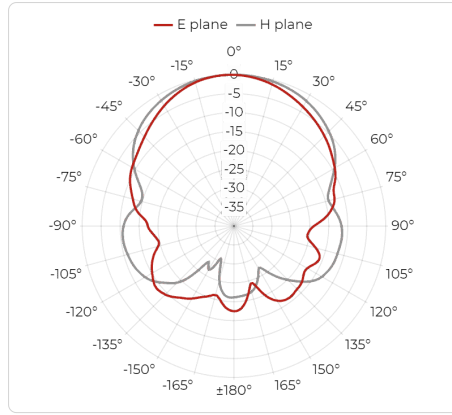


Port A, 8 GHz

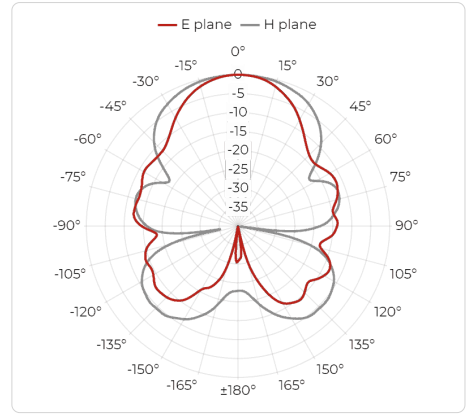


Port A, 10 GHz

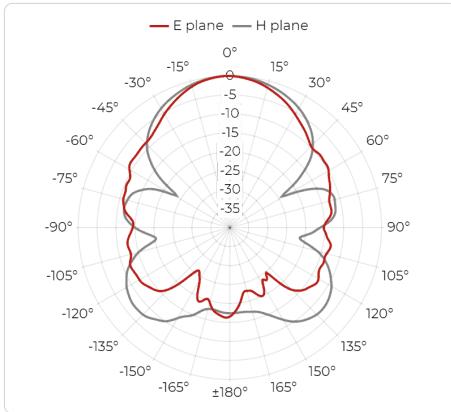


Port A, 12 GHz

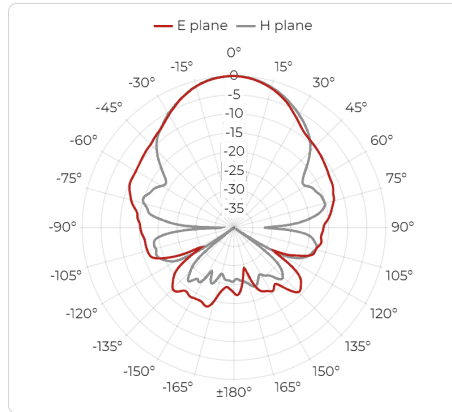


Port A, 16 GHz

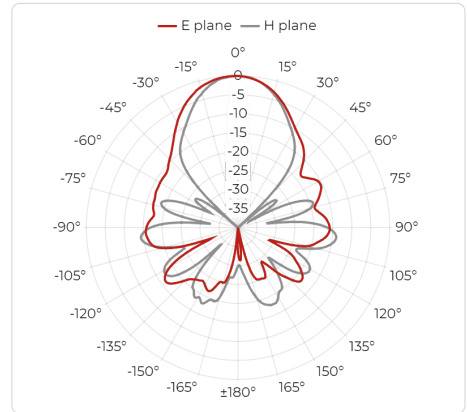


Port A, 20 GHz

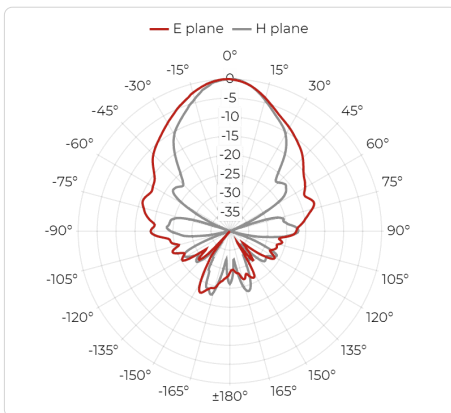


Port A, 24 GHz

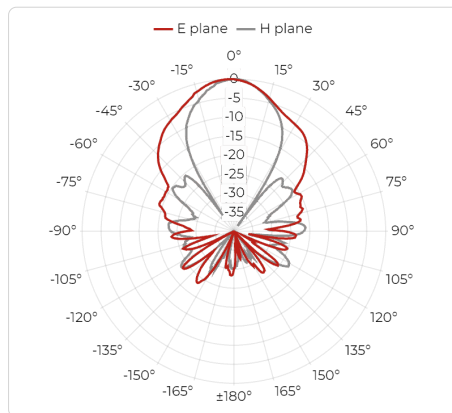


Port A, 28 GHz

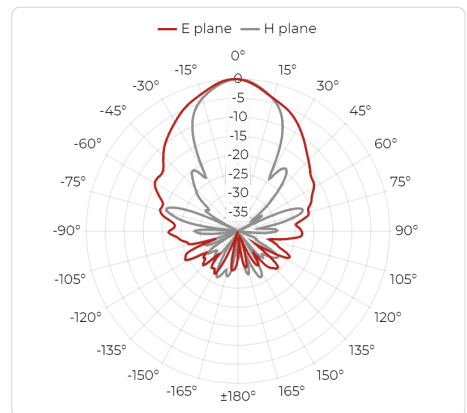


Port A, 32 GHz

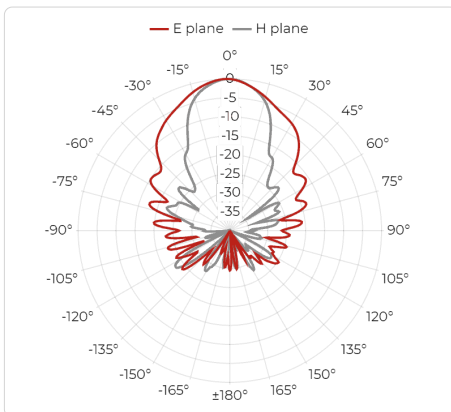

Port A, 36 GHz

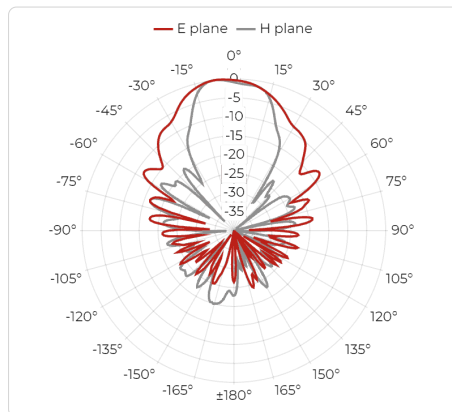


Port A, 40 GHz

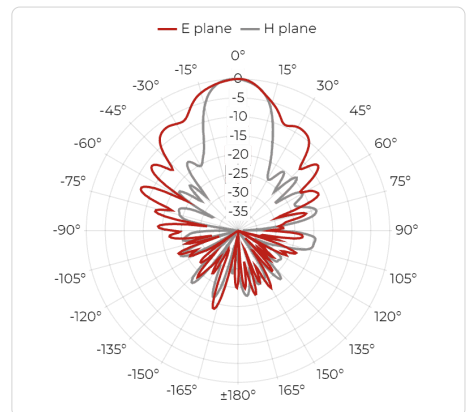


Radiation Patterns - Port B


Port B, 4 GHz

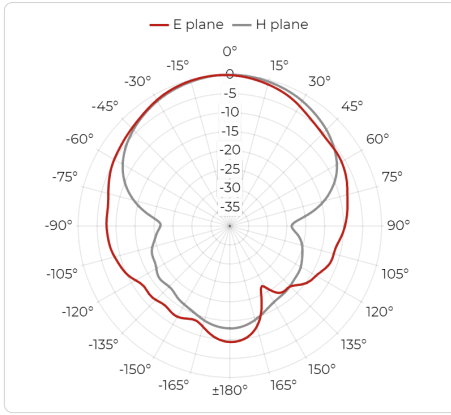


Port B, 6 GHz

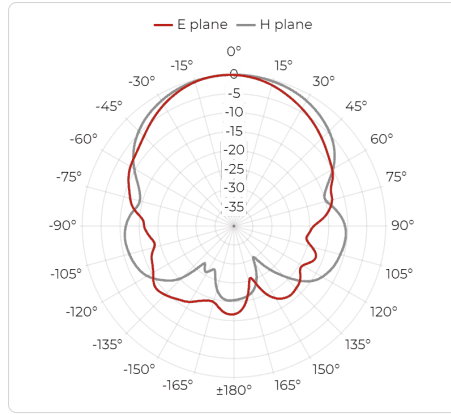


Port B, 8 GHz

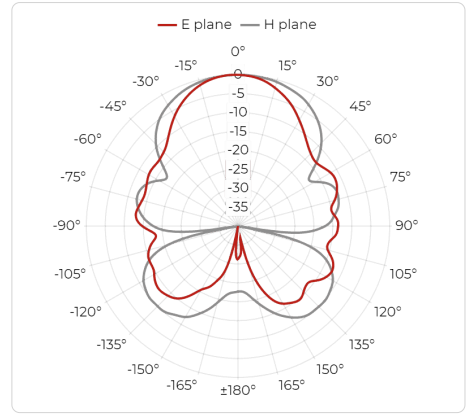


Port B, 10 GHz

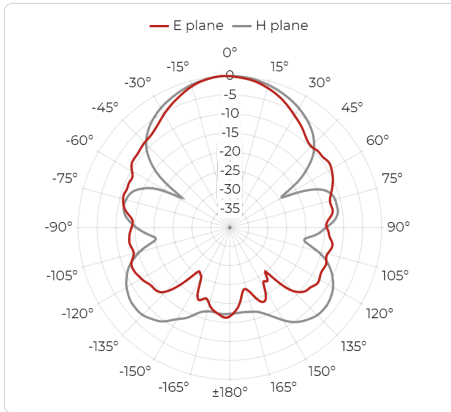


Port B, 12 GHz

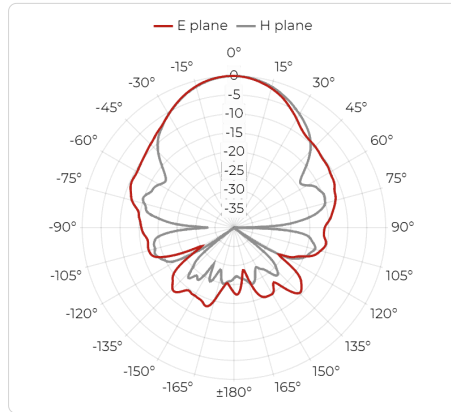


Port B, 16 GHz

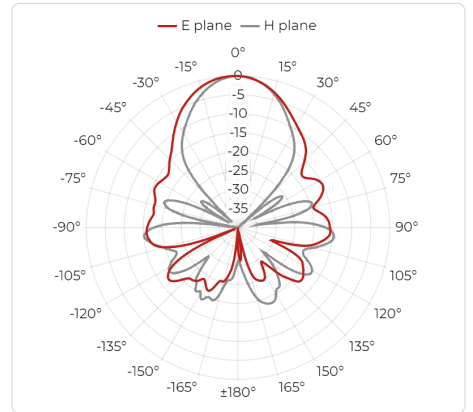


Port B, 20 GHz

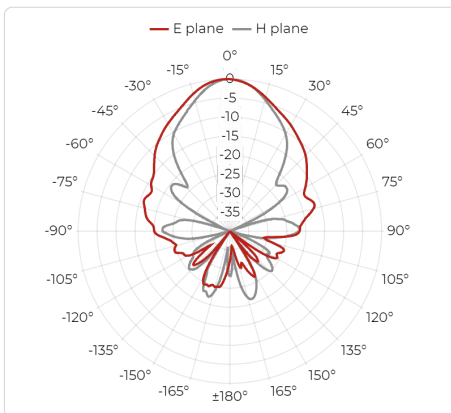


Port B, 24 GHz

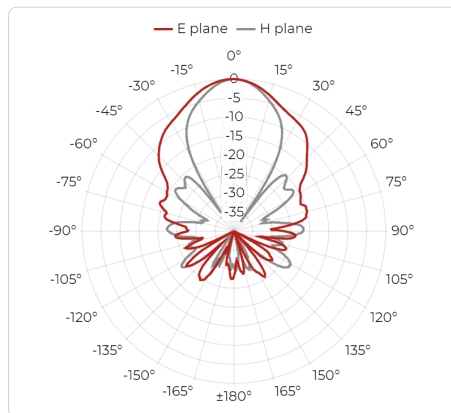


Port B, 28 GHz

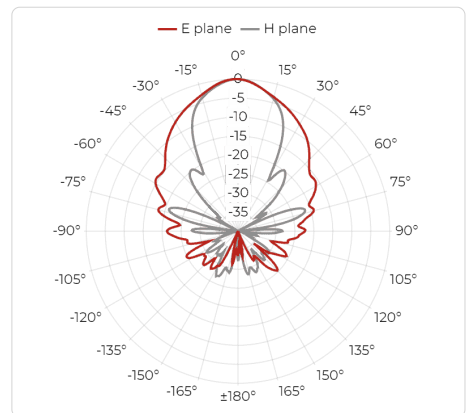


Port B, 32 GHz

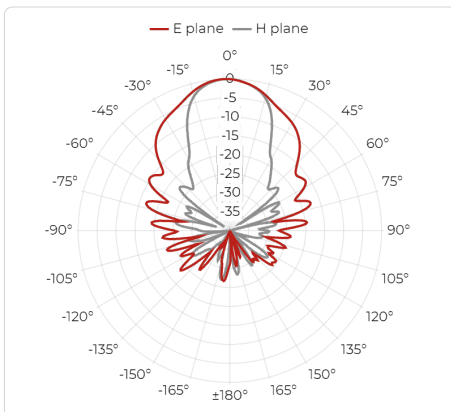

Port B, 36 GHz

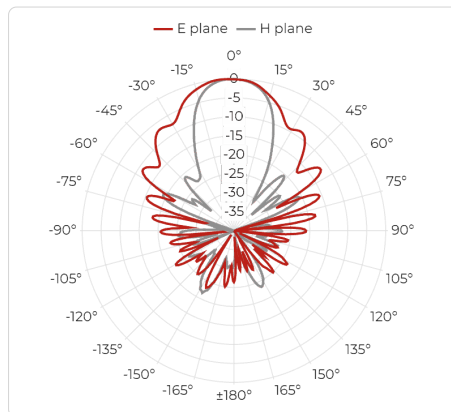

Port B, 40 GHz

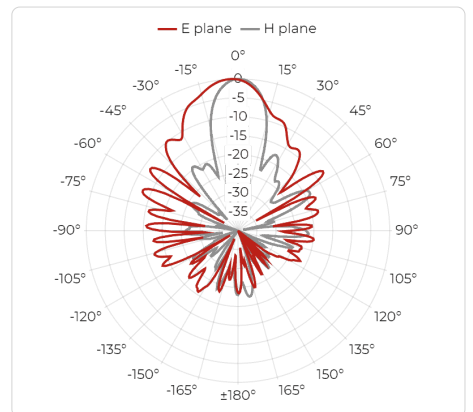

Packaging and Accessories

What's in a box

- QRH40 Antenna
- Antenna specific mount adapter with ¼ inch inner thread
- Protective wooden case
- Factory calibration certificate
- Full calibration report of each antenna
- QR code accessing online portal
- Calibration test dataset (available online)

Accessories

- Standard mounting flange



Protective wooden case



Factory calibration report

Custom services

- Custom mounting solutions
- Custom calibration data

Manufacturer Information

About Datasheet

Product information available also online at
<https://www.rfspin.com/product/qrh40/>

Data and specifications subject to change without notice.

Datasheet revision 07-2021.

© RFspin 2021

Address

RFspin s.r.o.
Na Beránce 57/2
160 00 Prague 6
Czech Republic

E-mail

info@rfspin.com

Phone

+420 245 008 847